




MB200i 2" portable
MB400i 4" portable
MB410i 4" portable



Industrial Thermal Printer | MBI Series

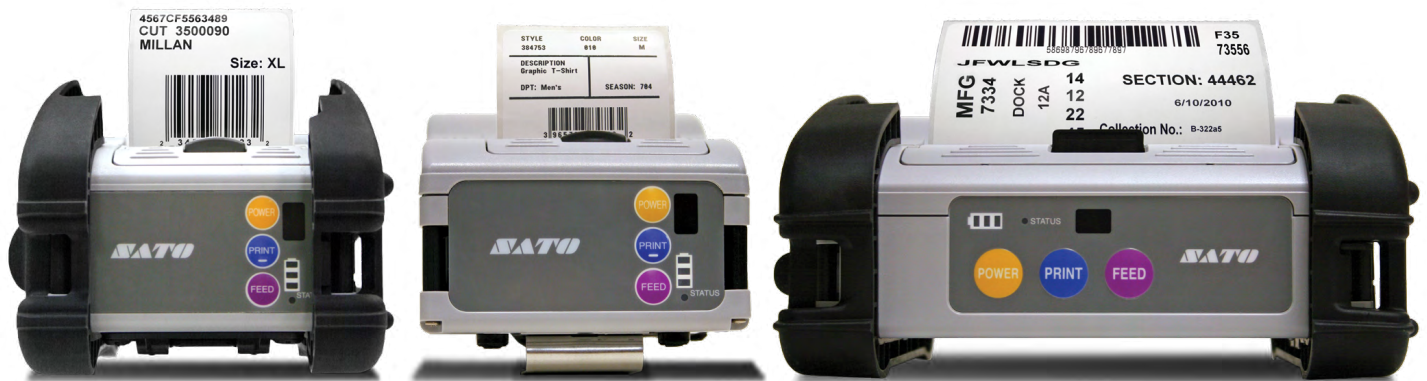

Quick and Durable. Ultimate Performance and Mobility.



Small & Light
Durable & Dependable



Top Cover Opening
for Easy Media Load



Large LCD Display
(802.11 b/g model)



Large Operator
Control Buttons

Streamlined Features

- Light Weight & Portable
- USB (MB400/410i only)
- 802.11g Wireless
- Bluetooth Connectivity
- RS232 (Serial)
- Direct Thermal
- Label Peel and Present

Industry Verticals

- Retail
- Law Enforcement
- Government
- Manufacturing
- Utilities
- Logistics
- Transportation

Industry Applications

- Label Printing
- Receipt Printing
- Price Marking
- Mark Down
- Specimen Labeling
- Shelf Labeling
- Route Accounting



GENERAL SPECIFICATIONS

MB200i | MB400i | MB410i

PRINTER MODEL		MB200i	MB400i	MB410i
PRINT SPECIFICATIONS				
Printing Method		Direct Thermal		
Print Resolution		203 dpi (8 dots/mm)	203 dpi (8 dots/mm)	305 dpi (12 dots/mm)
Printing Speed		Up to 4 ips (103 mm/s) at 16% printing coverage. Default Print Speed is 3 ips (75 mm/s).		
Maximum Print Area		1.89" (48 mm) W x 6.3" (160 mm) L	4.09" (104 mm) W x 11.69" (297 mm) L	
MEDIA SPECIFICATIONS				
Sensor Type		Reflective Sensor (for use with pre-printed marks). See-Through Sensor (for die-cut label with gap) Dispenser Sensor.		
Media Type		Roll Die-Cut Label with Gap or Pre-Printed Label, Linerless Media, Continuous Receipt Paper		
Media Size	Width	1.1" - 2.2" (28 mm - 57.5 mm) ¹	2" - 4.49" (53 mm - 114 mm) ¹	
	Length	0.63" - 6.4" (16 mm - 163 mm) ¹	1.1" - 11.8" (28 mm - 300 mm) ¹	
	Thickness	0.003" - 0.007" (0.064 mm - 0.19 mm)		
	Roll Specs	Outer Diameter: 2.63" (67 mm) - Inner Diameter: 0.75" (19 mm) or 1" (25 mm) for standard labels 0.4" (10 mm) coreless for receipt paper or 0.75" (19 mm) for linerless paper		
FONT/SYMBOLOGIES				
Internal Fonts		XU, XS, XM, XB, XL, OCR-A, OCR-B, CG Times and Triumvirate		
Barcode Symbolologies	Linear	UPC-A, UPC-E, EAN-8, EAN-13, Code 39, Code 93, Code 128, Codabar, MSI, Bookland, Industrial 2/5, Interleaved 2/5, Matrix 2/5, Postnet™, GS1-128, GS1-DataBar™		
	2-D	PDF417, Micro PDF417, Truncated PDF417, Maxicode™, Data Matrix, QR Code, Composite Symbology		
INTERFACE CHARACTERISTICS				
Interfaces		RS232C, Bluetooth, IrDA (Ver.1.2, Standard Protocol, IrCOMM (3-wire cooked)), 802.11b/g Wireless LAN (Supports WEP 64/128bit, WPA, WPA (PSK, 802.1x), and EAP)		
			USB	
OPERATING CHARACTERISTICS				
Battery		7.4 V (2400mAH) Lithium Ion	14.8V (1700mAH) Lithium Ion	
Environment	Operating	5° F – 122° F (-15° C – 50° C), 20%-80% RH, non-condensing 32° F – 122° F (0° C – 50° C), 20%-80% RH, non-condensing for 802.11g/b		
	Storage	-13° F – 140° F (-25° C – 60° C), 20%-80% RH, non-condensing		
Regulatory Approvals		FCC Class A, B, C, UL, CE, TÜV, CSA		
Dimensions (with rubber boots)		3.5" (88 mm) L x 5.03" (128 mm) W x 2.9" (73 mm) H	3.9" (99 mm) L x 8" (202 mm) W x 6.5" (165 mm) H	
Weight (with rubber boots)		0.9 lbs. (405 g) including battery pack	2 lbs. (910 g) including battery pack	
Drop Specification		6 ft. (1.83 m) - flat sides of printer to concrete	5 ft. (1.5 m) - flat sides of printer to concrete	
OTHER				
Optional Accessories		Battery Charger (Single and Multi-Battery Capabilities), Spare Battery, AC Adapter, Serial to PC Cable		
		Optional Swivel Belt, Weather-Resistant Carrying Case ² , Holster ² , Optional Shoulder Strap	Shoulder Bag with Rain-Resistant cover ² , Shoulder Strap and Belt Bag ²	
OPERATIONAL FEATURES				
Firmware Features		Auto Power Save. Printer enters sleep mode when idle for 5 seconds. Printer will power off automatically when idle for another 5 minutes (Programmable power off feature).		
Self Diagnosis Tools		Head Check, Battery Balance Check, Paper End, Head Open, Test Print, Over charge/discharge protection		

¹ Includes Backing Liner

² Non-booted Models

SATO AMERICA, INC.

CORPORATE

10350-A Nations Ford Rd
Charlotte, NC 28273
Phone: (704) 644-1650
Fax: (704) 644-1662
satosales@satoamerica.com

LABEL MANUFACTURING, SERVICE & SALES

NORTH AMERICA	BRAZIL	ARGENTINA
Illinois	Sao Paulo	Buenos Aires
Florida		
New Jersey		
North Carolina		

©2013 SATO America, Inc. All rights Reserved. Rev E • Specifications subject to change without notice • Any unauthorized reproduction of this content, in part or whole, is strictly prohibited • SATO is a registered trademark of SATO Corporation and its subsidiaries in Japan, the U.S. and other countries. All other trademarks are the property of their respective owners.



800 729 0236
www.logiscenter.us



0241 9550 9225
www.logiscenter.de



01 82 88 44 70
www.logiscenter.fr



020 3318 8265
www.logiscenter.co.uk



0720 115814
www.logiscenter.at



02 58 80 583
www.logiscenter.be



911 433 048
www.logiscenter.com



02 4792 1697
www.logiscenter.it



308 800 842
www.logiscenter.pt

About LOGISCENTER

Logiscenter is the leading provider of automatic identification and data capture equipments. Our products include barcode printing and reading devices, mobile computing devices, wireless access points, identification cards, and consumables.

Reasons to work with us

Our customers come first. Our objective is not only selling our products but also holding a long-lasting relationship with our customers, based on the benefits and advantages we create for you and your company.

The best brands. We offer products from the best manufacturers worldwide.

Expert technical support team. Our support staff are experts in the products we sell. But not just the products, they can tell you the best solution for your particular problem or need.

Largest stock. We have a permanent stock of more than 60,000 products.

Same-day shipping. For all orders placed and confirmed before 16:00 on working days.

Best prices. With Logiscenter, you can be sure that you are paying a fair price for your products, we will not overcharge you.

Easy returns. Damaged or defective products can be returned easily, for an exchange or reimbursement.



All Brands Technical Service


Our Brands




Solutions for: Industry • Consumer • Mobility Transportation and Logistics • Retail • Health



Label printers



Barcode readers



Data terminals & PDA



PVC card printers



RFID



Consumables
(labels, ribbons, PVC cards)