



USB Display
7" Monitor 70-SM
Operation Manual



Version 1.0

CONTENTS

1. Safety Instructions.....	
2. Connections and Installation.....	
3. Accessories.....	
4. Specifications	
5. Troubleshooting.....	

1.Safety Instructions

These safety instructions must be followed to ensure your safety and prevent property damage.

Warning/Cautions otherwise, it may result in personal injury or property damage.

Make sure to read the instructions carefully and use the product in the correct manner.

1. Power adapter:
USB 0.75A/5V
2. Do not place 70-SM USB in a location exposed to moisture, dust, smoke, water, or in a car., this may result in electric shock or fire.
3. Clean the product using a soft cloth with a monitor cleaner only.
Ensure that water does not enter the product and that it is not wet.
Otherwise, this may result in electric shock, fire or a malfunction.
Do not force on LCD Screen
4. Do not force on LCD Screen
Do not tap or scratch LCD Screen with a sharp object, otherwise, LCD may get damaged.
5. Product Input/Output Connectors
Do not insert any metal, such as chopsticks, coins, pins and steel.
of foreign material enters the product.
Otherwise disconnect the adapter cable and contact a Service Center.
6. Do not install 70-SM USB in an unstable location.
Otherwise, it may fall and cause personal injury and/or damage the product.

2.Connections and Installation

1.Installing monitor driver (Auto Run)


Double click the icon



2.Click / Accept.


DisplayLink Core software and DisplayLink Graphics installs.

Note: The screen may flash or go black during the install.

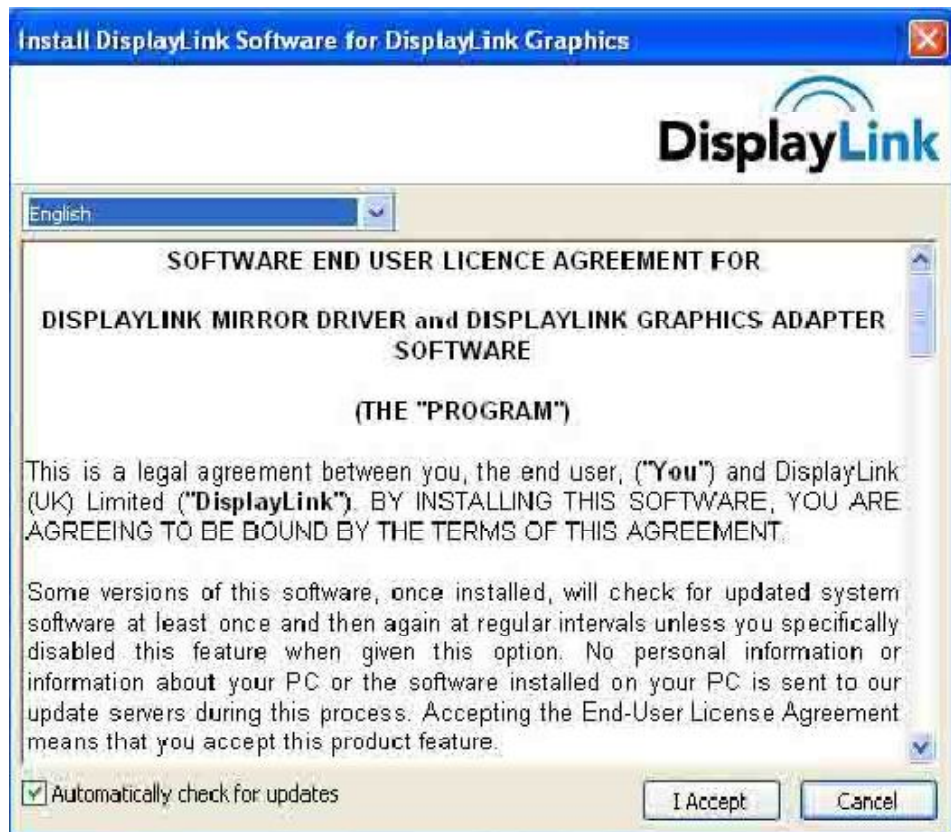

3. Connect your DisplayLink device via the USB cable to your PC

Note: The power supply needs to be dual USB connector to the PC.
you must complete this step before connecting the 70-CT USB Display
USB port

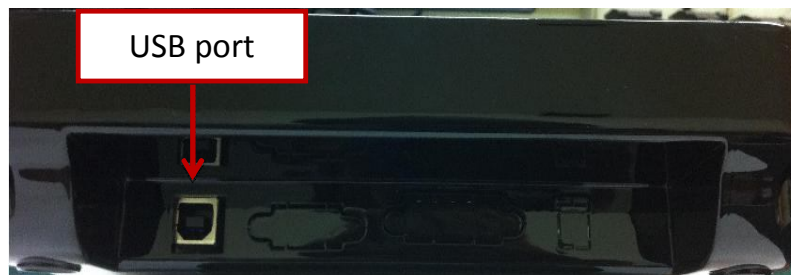

4. When the 70-CT USB Display driver installation is complete, the 70-CT USB Display setting icon appears on your system tray.




5. Click-on 70-CT USB Display icon then you may see the 70-CT USB Display setup menu for Screen Resolution, Colors, Rotation, Extension and etc.



3.Accessories



Manual



Fixation



Fixation screws



USB Cable

4.Specifications

LED backlight Life time	10,000 (Min)
Power Supply	USB 5V
Power Consumption	0.75A
Standby power consumption	lower then 0.1A
Active area	152.4 x 91.5 mm
Response time	11ms
Color	262,144
Contrast	400 : 1
Brightness	350 cd/m2
Viewing angle	70 / 60 degree
Weight:	1.02 kg
Certifications	CE / FCC
Operating temperature	0 ~ 40 c
Storage temperature	-10 ~ 50 c
Operating humidity	20% ~ 80%(non-condensing)
Storage humidity	10% ~90%(non-condensing)

5. Troubleshooting

Before calling for assistance, please read below carefully. In case further assistance is needed, please call local service center or contact your dealer.

1. No picture on screen

- a. Check the AC cord and signal cable. Make sure they are properly connected.
- b. Check if the computer has entered energy saving mode.

2. Abnormal display color

Check if the signal cable is properly connected to the computer.

3: How can I clean the outer case/LCD Panel?

Disconnect the USB Cable and then clean the 70-SM with a soft cloth

Do not leave any detergent or scratches on the case. Do not let any water enter the monitor

4: 70-SM USB Display information remains in my 'Display Properties' even after disconnect or power off the 70-SM USB Display.

The deactivated USB information implies power off or disconnected USB Display status. To delete the deactivated monitor information, please uninstall 'Displaylink Core software' driver. Once the driver is uninstalled, you may not use 70-SM USB Display. To use 70-SM USB Display again please re-install the driver.