



**MATRIX 450™** is the high-end industrial 2D reader designed for logistic applications. Through 5 million pixels captured 15 times in a second, **MATRIX 450™** enables a range of applications never covered before by a 2D-Imager.

**MATRIX 450™** perfectly meets the requirements of both automated and manual material handling.

Thanks to the extraordinary acquisition rate at very high resolution and the strong illuminator, it is the perfect solution for high speed transportation on small and middle size conveyors. With Matrix 450™ multiple reading attempts are no longer needed: the large area coverage in a single shot permits the highest throughput and maximum ease of use. Some additional features - continuous frame acquisition, no-flashing white illumination, colored spot indicators - actually make **MATRIX 450™** the unprecedented solution for operator attended applications, as manual object presentation in overhead scanning mode or manual conveyor loading.

The **ID-NET™** readers clustering permits to effectively extend the reading area for single-side and multi-side applications. Captured image are stored on-board and optionally transferred to external supports through the integrated Gigabit Ethernet connectivity.

No moving parts, rugged metal construction, IP65 enclosure rate and operative temperature up to 50°C guarantee a long life cycle even in harsh industrial environments.

**5MP  
Sensor**

*Ultra Large FOV*



*Adjustable Focus*

**Xpress  
interface**

*Ease of use*



*Continuous  
High Power*



*Aiming System*



IDENTIFICATION

## HIGHLIGHTS

- 5MP image sensor, 15 FPS
- Gigabit Ethernet Integrated Connectivity
- Adjustable focus through C-Mount lenses
- White and Blue lighting options
- Continuous, no-flashing Lighting
- Colored spot indicators
- Outstanding decoding capability on 1D, 2D, Stacked, Postal symbologies
- Region Of Interest Windowing for higher frame rate
- Blue Diamonds™ aiming and focusing system
- X-PRESS™ for easy and intuitive setup
- ID-NET™ embedded high speed connectivity


## APPLICATIONS

### Transportation & Logistic

- Automated sorting
- Manual Postal sorting

### Distribution and Retail

- Order fulfillment and verification
- Multimedia sorting
- Reverse Logistics process

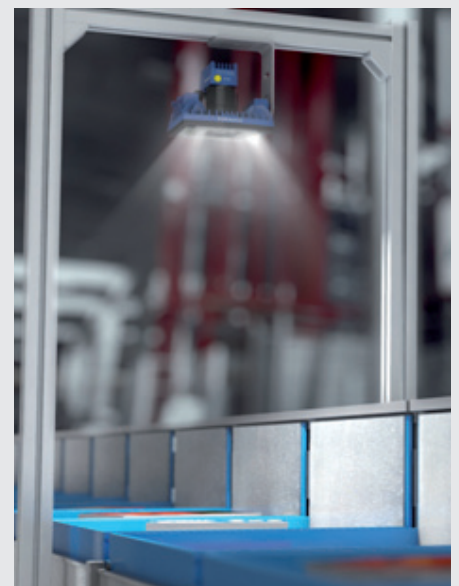

## TECHNICAL DATA

|                       | PHYSICAL CHARACTERISTICS                    |
|-----------------------|---------------------------------------------|
| Dimensions            | 170 x 200 x 150 mm – 6.7 x 8.9 x 5.9 inches |
| Weight                | 3000 g. – 6.6 pounds (with lens)            |
| Case material         | Aluminum                                    |
| Operating temperature | 0 to 50 °C (32 to 122 °F)                   |
| Storage temperature   | -20 to 70 °C (-4 to 158 °F)                 |
| Humidity              | 90% non condensing                          |
| Protection class      | IP65                                        |

|                         | PERFORMANCE                                                                                                                                                                                                                                                        |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Optical features        | 2448 X 2050<br>CCD sensor                                                                                                                                                                                                                                          |
| Frame rate              | 15 frames/s                                                                                                                                                                                                                                                        |
| Reading angles          | Max. Pitch: ± 35°; Tilt: 0-360°                                                                                                                                                                                                                                    |
| Readable symbologies    | 1D and Stacked: IL 2/5, Code 128, Code 39, EAN/UPC, PDF417, Micro PDF417, Pharmacode, GS1 DataBar (RSS) family, and many more.<br>2D: Data Matrix, QR Code, Micro QR, Maxicode, Aztec, Microglyph<br>Postal: Royal Mail, Japan Post, Planet, Postnet and many more |
| Communication interface | RS232 + RS232/RS422/RS485 up to 115.2 Kbit/s<br>Ethernet IEEE 802.3z 1000BaseT compliant<br>ID-NET™ port up to 1 Mbps                                                                                                                                              |
| Connectivity modes      | Pass Through, Master/Slave, Multiplexer, Ethernet point to point                                                                                                                                                                                                   |
| Digital inputs          | Two SW programmable, optocoupled and polarity insensitive                                                                                                                                                                                                          |
| Digital outputs         | Two SW programmable, optocoupled                                                                                                                                                                                                                                   |
| Programming method      | X-PRESS™ Human Machine Interface<br>Windows™ based SW (VisiSet™) via serial or Ethernet link<br>X-PRESS™ Human Machine Interface                                                                                                                                   |
| User interface          | Beeper, Programmable Push Button, LEDs (Status, Com, Trigger, Good, Ready, Power on, Network presence, Good read Spot)                                                                                                                                             |

|                   | ELECTRICAL CHARACTERISTICS            |
|-------------------|---------------------------------------|
| Power supply      | 24 Vdc±20%                            |
| Power consumption | 2,5 A ( 0,5A Matrix 450 , 2A LT-03x ) |

## MODELS & ACCESSORIES


|             | ORDER NO. | DESCRIPTION                             |
|-------------|-----------|-----------------------------------------|
| Reader base | 937400024 | MATRIX 450 800-030 5MP GIGE             |
| Lighting    | 93A400032 | LT-030 ULTRA POWER LT SUPERNARROW BLUE  |
|             | 93A400033 | LT-031 ULTRA POWER LT SUPERNARROW WHITE |
|             | 93A400034 | LT-032 ULTRA POWER LT NARROW BLUE       |
| Lens        | 93ACC0041 | LNS-1216 16MM C-MOUNT LENS 5MP          |
|             | 93ACC0034 | LNS-1225 25MM C-MOUNT LENS 5MP          |
|             | 93ACC0035 | LNS-1235 35MM C-MOUNT LENS 5MP          |
|             | 93ACC0036 | LNS-1250 50MM C-MOUNT LENS 5MP          |
| Accessories | 93A050032 | CAB-LD-002 LT DRIVER +PWR 0.2M          |
|             | 93A050044 | CAB-LD-102 LT DRIVER NO PWR 0.2M        |
|             | 93A050033 | CAB-LP-03 LIGHTING POWER 3M             |
|             | 93A050037 | CAB-LP-05 LIGHTING POWER 5M             |
|             | 93A050034 | CAB-GE01 M12-IP67 TO RJ45 1M            |
|             | 93A050035 | CAB-GE03 M12-IP67 TO RJ45 3M            |
|             | 93A050036 | CAB-GE05 M12-IP67 TO RJ45 5M            |
|             | 93A050043 | CAB-PG-0105 VDC PWR PG120-M450 5M       |
|             | 93ACC1870 | CAB-PG-0002 VDC PWR PG120-IDNET 2M      |
|             | 93ACC0046 | PG-120-K01 PWR SUPPLY KIT FOR M450 (EU) |
|             | 93ACC0047 | PG-120-K02 PWR SUPPLY KIT FOR M450 (UK) |
|             | 93ACC0048 | PG-120-K03 PWR SUPPLY KIT FOR M450 (US) |




Manual Postal sorting



Automated sorting

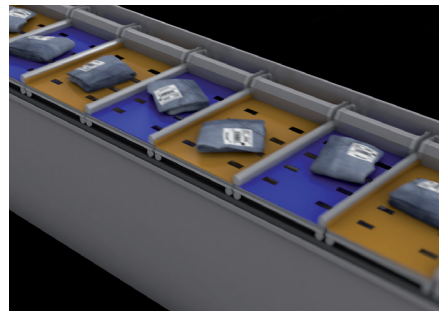

Order Fulfilment and verification

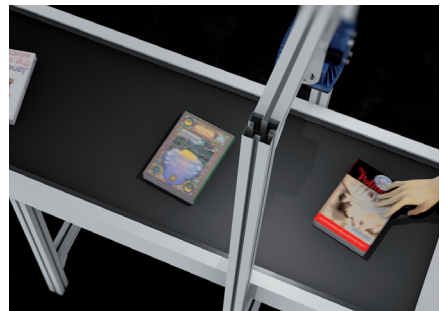

Manual Loading



[www.logiscenter.com](http://www.logiscenter.com)  
902 050 030



[www.logiscenter.it](http://www.logiscenter.it)  
02 479 216 97



[www.logiscenter.de](http://www.logiscenter.de)  
info@logiscenter.de



[www.logiscenter.pt](http://www.logiscenter.pt)  
308 800 842

## About LOGISCENTER

Grupo Logiscenter is the leading provider in Europe of automatic identification and data capture equipments. Our products include barcode printing and reading devices, mobile computing devices, wireless access points, identification cards, and consumables.

## Reasons to work with us

**Our customers come first.** Our objective is not only selling our products but also holding a long-lasting relationship with our customers, based on the benefits and advantages we create for you and your company.

**The best brands.** We offer products from the best manufacturers worldwide.

**Expert technical support team.** Our support staff are experts in the products we sell. But not just the products, they can tell you the best solution for your particular problem or need.

**Largest stock.** We have a permanent stock of more than 12,000 products.

**Same-day shipping.** For all orders placed and confirmed before 16:00 on working days.

**Best prices.** With Logiscenter, you can be sure that you are paying a fair price for your products we will not overcharge you.

**Easy returns.** Damaged or defective products can be returned easily, for an exchange or reimbursement.

## Solutions for: Industry • Consumer • Mobility Transportation and Logistics • Retail • Health



Label printers



Barcode readers



Data terminals & PDA



PVC card printers



RFID



Consumables  
(labels, ribbons, PVC cards)

## Our Brands



MOTOROLA



Intermec®

Honeywell®

DATALOGIC™



datamax • o'neil

Metrologic

LXE

EPSON®

elo

star

unitech

PRINTRONIX

symbol®



All Brands  
Technical Service